



SSR-1U Auxiliary Cable v2

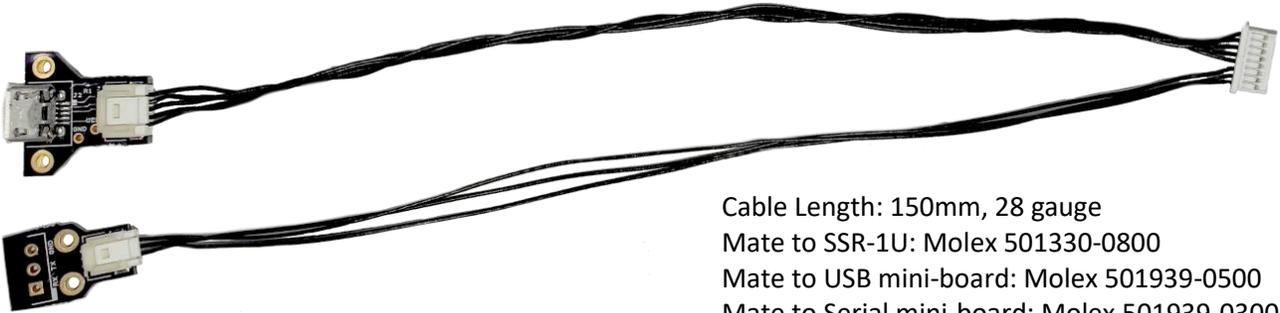


Cable Length: 150mm, 28 gauge
 Mate to SSR-1U: Molex 501330-0800
 Mate to USB mini-board: Molex 501939-0500
 Mate to Serial mini-board: Molex 501939-0300

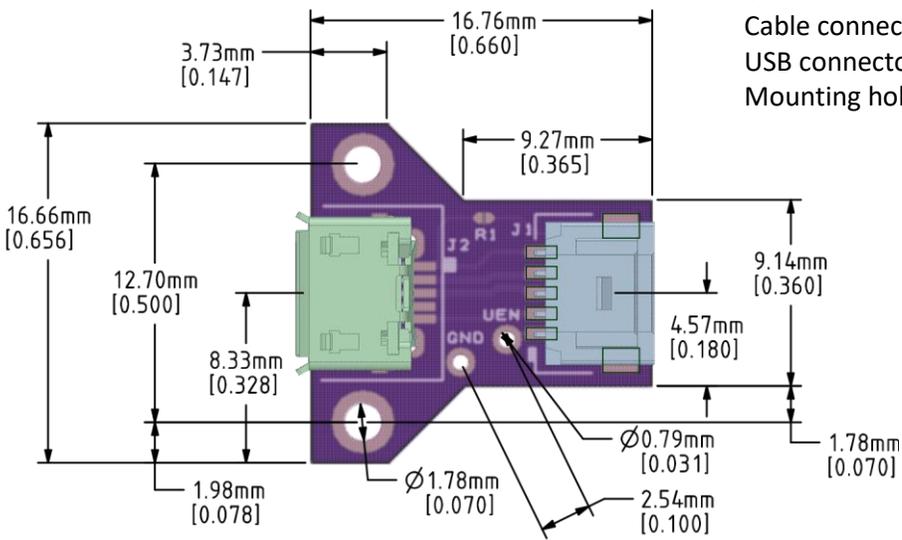

USB mini-board
 Cable connector: Molex 501953-0507
 USB connector: Amphenol 10103594-0001LF
 Mounting holes for #0 or M1.6 hardware

Default configuration has R1 shorted, which ties USB Enable (UEN) of the SSR-1U to the 5V USB supply. If R1 is opened, the UEN and GND pads can be used with a switch that enables USB when UEN is grounded. See the User's Manual for UEN configuration options.

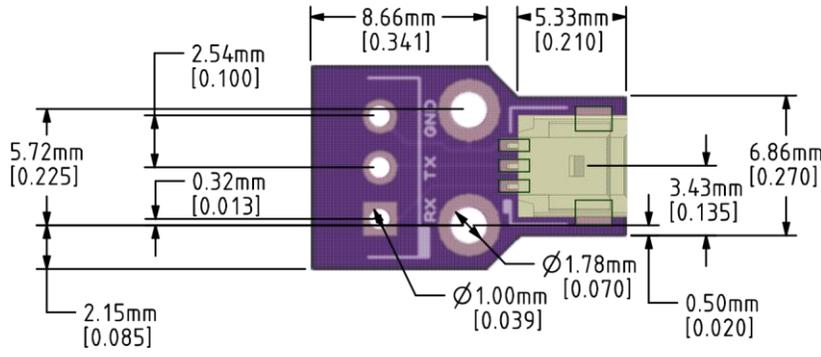

Serial mini-board
 Cable connector: Molex 501953-0307
 Serial connector: Holes for 0.100 header
 Mounting holes for #0 or M1.6 hardware